


- NOTES**
- EXTERNAL EMERGENCY LIGHTING TO THE PERIMETER THE DESIGN OF THE LIGHTS IS A DOWNWARD PROJECTION FITTING MOUNTED, WHICH IS DESIGNED TO PROVIDE MINIMAL OVERSPILL LIGHT IN THE HORIZONTAL DIRECTION. THE LIGHTS WOULD BE SET ON A TIMER SO THEY ARE ONLY SWITCHED ON AFTER 6AM AND SWITCHED OFF AFTER 10PM. THE LIGHTS WOULD BE CONTROLLED BY INFRA-RED MOVEMENT SENSORS.
 - CLADDING SURFACES COATED WITH AN ANTI-GRAFFITI GLAZE AND AS ALTERNATIVE MEASURES FOR REDUCING GRAFFITI WILL BE GROWING AN APPROPRIATE NON-INVASIVE CLIMBING PLANT UP THE WALL
 - GRILLES, AIR VENTILATION APERTURES AND SHUTTERS FITTED SO THAT THEY CANNOT BE REMOVED TO PERMIT UNAUTHORISED ACCESS
 - LIGHTWEIGHT ROOFING SYSTEMS MUST BE CERTIFIED TO A MINIMUM OF:
 - LPS 1175: ISSUE 5 OR ABOVE, SR 1
 - STS 202: ISSUE 1 OR ABOVE, BR1
 - DOORS TO BE MANUFACTURED TO A DESIGN THAT HAS BEEN SHOWN BY TEST TO MEET THE REQUIREMENTS OF BRITISH STANDARD PUBLICATION PAS PAS24:2012 OR DESIGNED AND MANUFACTURED IN ACCORDANCE WITH APPENDIX B OR APPROVED DOCUMENT Q

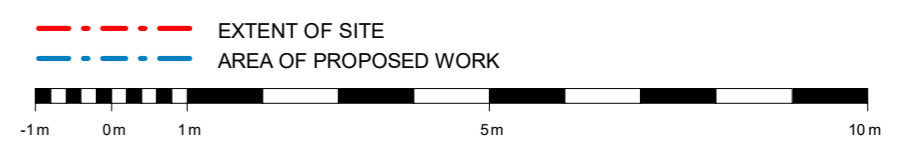

This page is intentionally left blank